

REVERSE FLOW SPIN-CLEANING LIQUID FILTERS**BACKGROUND OF THE INVENTION**

The present invention relates to liquid filters, particularly for water irrigation
5 systems, however also useful for other industrial or domestic applications.

More specifically, the invention concerns filter devices of the type disclosed in
our US Patent No. 6,398,037 issued June 4, 2002 which is hereby incorporated by
reference (hereinafter called "the Patent").

The Patent relates to filter devices utilizing a battery of filter discs with reverse
10 flushing water flow cycles wherein the discs were caused to spin under the impact of
water jets impinging thereon (hereinafter referred to as "Spin-Clean Filters").

For better understanding of the invention herein disclosed, reference shall be
made to Fig. 1 which depicts the reverse flow spin-cleaning stage of the filter device
(conforming Fig. 10 of the Patent except that the spin-cleaning stage is provoked by
15 the reverse flow proper rather than by an external pressure command, a feature
which is understood to be encompassed within the scope of the Patent).

Using the same reference numerals as in the Patent, the water (or other
liquid) admitted through the outlet port 20 flows into the conduit 30a (and conduits
30b and 30c that are not shown) and, through an opening 102a (not existing in the
20 Patent exemplified embodiment) into the cylinder space 40 of the cylinder-and-piston
assembly 28. Under a pressure sufficient to overcome the force of the spring 52, the
piston 58 along with the cap member 60 will slide towards the distal end of the filter
10, relieving the clamping of the filter discs battery 70. The stroke of piston 58 is
delimited by a protrusion 104 formed at the housing member 12 (shown but not

referenced in the Patent drawings). As will be explained later on, this need for an extra, exterior element for stopping the progress of the piston has been found disadvantageous and hence remedied by one aspect of the present invention.

Turning now to the proximal end of the filter device 10, there has been used a female screw-threaded ring portion 38 of the fixed member against which the filter discs are pressed for mounting the integral main filter core member 24 to the filter housing structure 14 intermediate female screw-threaded ring 82. This mounting or coupling arrangement has also been found worthy of improvement as will be explained in detail below.

10

SUMMARY OF THE INVENTION

Thus provided according to one aspect of the invention is a liquid filtering device, particularly for irrigation water installations comprising a cylindrical housing with an inlet port and an outlet port; a cylindrical filter member installed within the housing so that, water flowing from the inlet port to the outlet port enters the filter member in a radial direction, and is discharged through the outlet port, and vice-versa during reversed, filter flushing flow cycles; a core member centrally mounted within the cylindrical space defined by, and forming a support for, the filter member; a fixed member abutting against the filter member at one axial end thereof; a piston assembly mounted to the core member comprising a piston and a displaceable member coupled to the piston and abutting against the filter member at the other axial side thereof; wherein said mounting of the core member comprises a female screw-thread forming part of the said fixed member; a female screw-threaded split ring matching the female screw-thread; and a circular convergent cone shaped

trough encompassing the ring fixedly mounted to said housing; the arrangement being such that upon threading together, the ring becomes attracted towards the fixed member and thus self-tightened by frictionally clamping within the cone-shaped trough.

5 According to another aspect of the invention, the piston assembly is provided with means for limiting the progress amount of the piston, such as a coil spring, the number and size of the coils being designed so as to limit the stroke of the piston following a predetermined compression thereof.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

These and additional constructional features and advantages of the present invention will become more clearly understood in light of the ensuing description of a preferred embodiment thereof, given by way of example only, with reference to the accompanying drawings, wherein:-

15 Fig. 1 is a longitudinal cross-sectional view of the filter device of the Patent in reverse flush flow, spin-cleaning mode of operation;

 Fig. 2 is a cross-sectional view of a filter device incorporating the improvements of the preset invention;

 Fig. 3 shows the split-ring before assembly;

20 Fig. 4 shows the seat member of the split-ring;

 Fig. 5 shows the split-ring in the preparatory state for insertion into the seat member;

 Fig. 6 shows the assembled state of the split-ring;

Fig. 7a is a partial cross-section showing the initial state of engagement of the core coupling ring and the split-ring;

Fig. 7b shows the final state of engagement;

Fig. 8 is a schematic view of a group of filter devices installed in parallel; and

5 Fig. 9 is a schematic view of several filter devices installed in series.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

As clearly seen in Fig. 2, the mounting of the filtering discs battery 170 to the inlet/outlet housing member 114 has been modified. Rather than female screw-
10 threaded ring 82 (Fig. 1) there is provided an assembly comprised of seat member 200 and screw-threaded split-ring 202 shown in more detail in Figs. 3-7.

The seat member 200 is formed with a circular trough portion defined by circular rim 200a, convergent cone-shaped wall 200b and planar radial wall 200c.

The seat member 200 is shown as integrally formed with the outlet fitting but
15 other variations may be employed such as by welding.

The ring 202 is split as shown and made of an elastic or springy material to allow its closing by force (Fig. 5) into a reduced diameter which must be smaller than the opening defined by the rim 200a.

The outer surface 202a of the ring 202 is beveled by the same angle as the
20 seat cone wall 200b. The inner side is provided with a screw-thread matching that of the core member ring 138.

The height of the ring 202 is less than the distance between the inner surfaces of the rim 200a and of the radial wall 200c.

The mounting of the core member 124 is perfected in the following manner. First, the split-ring 202 is inserted into the trough portion by forcing it to close and placing thereinside, whereupon the ring will resume its partially open state (Fig. 7a). It is designed so that in this position the screw threads of the ring 138 and of the
5 split-ring 202 will match.

Upon relative rotation, the split-ring becomes dragged along the cone-shaped wall 200b up to a certain point (Fig. 7b). Consequently, a self-tightening effect occurs whereby a highly secured and sealed coupling of the threaded members to each other is attained in a more effective way than in the Patent construction (Fig.
10 1).

If necessary, stop means such as projection 200d may be provided to avoid the unison rotation of the two parts, at-least at the beginning of the operation where the friction between the beveled ring portions 202a and the seat wall portion 200b might be insufficient.

15 The dismantling of the core member 124 from the seat member 200 for maintenance or replacement purposes follows in the reverse order.

Turning now to the distal side of the filter device 110, it will be readily seen that, by properly choosing the number and diameter of the coils, the spring 252 functions as an autonomic stop, limiting the stroke of the piston 158 (and cap
20 member 160).

This seemingly minor and even almost obvious modification presents, however, the advantage of completely dispensing with the stop cap (104 – Fig. 1). Moreover, the length of the piston stroke can be governed and properly selected Irrespectively of the housing(s) size.

This variability becomes even more significant where the filter devices are used in groups, either in parallel or in series.

In Fig. 8 a battery of five filter devices 310 is shown (only three are seen) operating in parallel. The filters are mounted on a common base formed in inlet/outlet housing member 314, either by the arrangement described above or otherwise.

Noteworthy in the present context is that the cylinder and piston assemblies 328 incorporate the integral piston-stroke limiting means rather than external stop-by-abutment means (cap 104 in Fig. 1). This entails a significant saving in the design and structure of the other housing member 312.

The filter devices 410 of Fig. 9 operate in tandem between the common inlet and outlet, e.g. to achieve superfine quality of filtered liquid.

This type of construction is only enabled by implementation of the self-limiting piston-stroke means proposed according to the present invention.

Those skilled in the art to which this invention pertains will readily appreciate that numerous changes, variations and modifications can be effected without departing from the true spirit and scope of the invention as defined in and by the appended claims.

WHAT IS CLAIMED IS:

1. A liquid filtering device (110), particularly for irrigation water installations comprising:

5 a cylindrical housing (112) with an inlet port (120) and an outlet port (116);

a cylindrical discs-type filter member (170) installed within the housing so that, water flowing from the inlet port (120) to the outlet port (116) enters the filter member in a radial direction, and is discharged through the outlet
10 port, and vice-versa during reversed, filter flushing flow cycles;

a core member (124) centrally mounted within the cylindrical space defined by, and forming a support for, the filter member (170);

a fixed member abutting against the filter member at one axial end thereof;

15 a piston assembly (140) mounted to the core member (124) comprising a piston (158) and a displaceable member coupled to the piston and abutting against the filter member at the other axial side thereof;

characterized in that the mounting of the core member (124) comprises a male screw-thread ring (138) forming part of the said fixed member; a
20 female screw-threaded split ring (202) matching the male screw-thread; and a circular convergent cone shaped trough (200b) encompassing the ring fixedly mounted to said housing;

the arrangement being such that upon threading together, the split-ring becomes attracted towards the fixed member and thus self-tightened by
25 friction clamping within the cone-shaped trough.

2. The device as claimed in Claim 1 wherein the said trough is open at at least one side thereof (200a) allowing the split ring to be inserted therein by elastically squeezing same into a smaller diameter.

3. The device as claimed in Claim 2 wherein the said trough is integrally formed with a fitting (200) communicating the core member (124) with the inlet port (120) of the filter member.

5 4. The device as claimed in Claim 3 wherein a stop (200d) is provided within the trough for avoiding free rotation of the split ring (202).

5. The device as claimed in Claim 1 wherein the piston assembly is provided with means for limiting the progress amount of the piston.

10

6. The device as claimed in Claim 5 wherein said means comprise a coil spring (252), the number and size of the coils being designed so as to limit the stroke of the piston following a predetermined compression thereof.

15 7. The device as claimed in any of Claims 1-6 in use as one of a plurality of filter devices operating in parallel.

8. The device as claimed in any of Claims 1-6 in use as one of a plurality of filter devices operating in series.

- 9 -

AMENDED CLAIMS

[received by the International Bureau on 18 February 2005 (18.02.05);
original claim 1 replaced by amended claim 1;
remaining claims unchanged(1 Page)]

1. A liquid filtering device (110), particularly for irrigation water installations comprising:

5 Housing (112, 114) with an inlet port (120) and an outlet port (116);

a core member (124) centrally mounted within the housing comprising at one axial end thereof an abutment ring (138) associated with a male screw-thread for mounting the core member (124) to the housing (114) next to and
10 in communication with the inlet port (120);

a discs-type filter member (170) supported by the core-member (124) so that water flowing from the inlet port (120) enters the filter member in a radial direction, and is discharged through the outlet port (116), and vice-versa during reversed, filter flushing flow cycles;


15 a piston assembly (140) mounted to the core member (124) comprising a piston (158) and a displaceable member (160) coupled to the piston and abutting against the filter member at the other axial side thereof;

characterized in that the mounting of the core member (124) comprises a female screw-threaded split ring (202) matching the male screw-thread; and
20 a circular convergent cone shaped trough (200b) encompassing the split ring and fixedly mounted to housing,

the arrangement being such that upon threading together, the split-ring is attracted towards the abutment ring (138) and thus becomes self-tightened against the cone-shaped wall of the trough.

- 25 2. The device as claimed in Claim 1 wherein the said trough is open at at least one side thereof (200a) allowing the split ring to be inserted therein by elastically squeezing same into a smaller diameter.

1/7

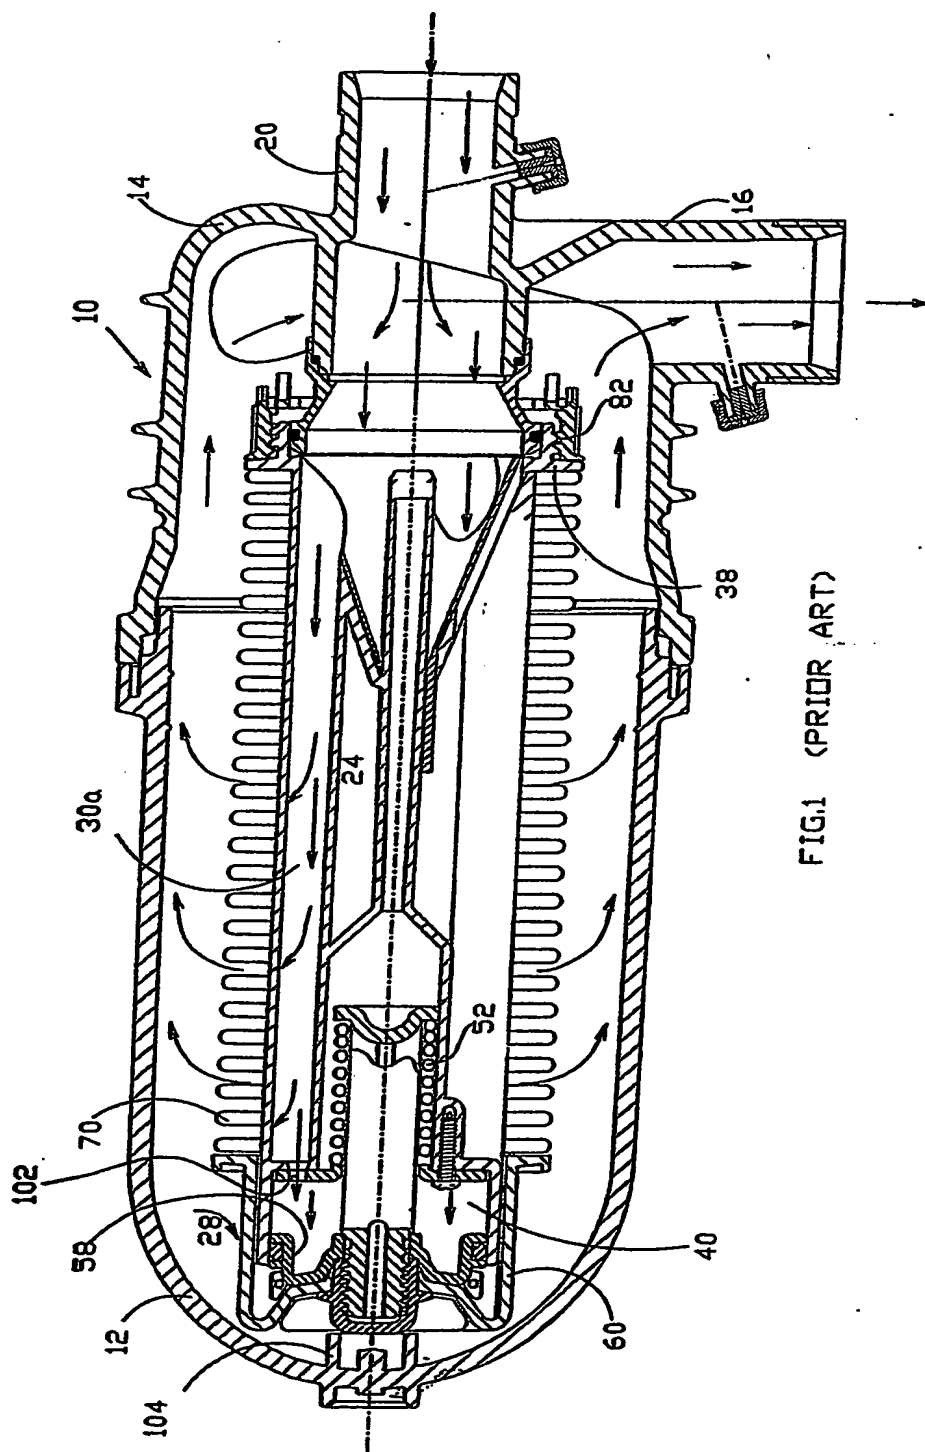

2/7

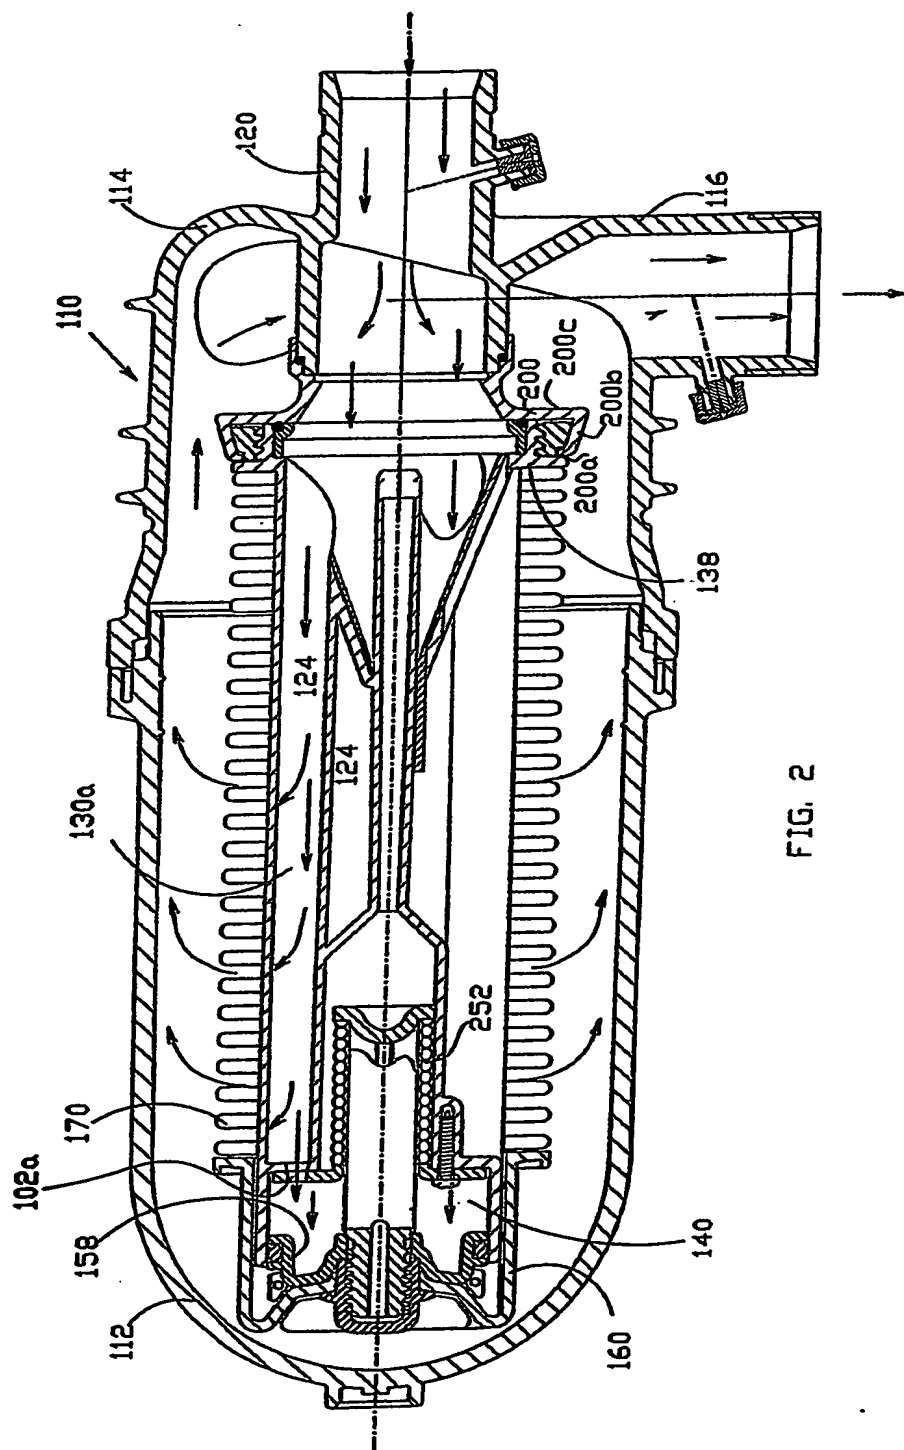


FIG. 2

3/7

FIG. 3


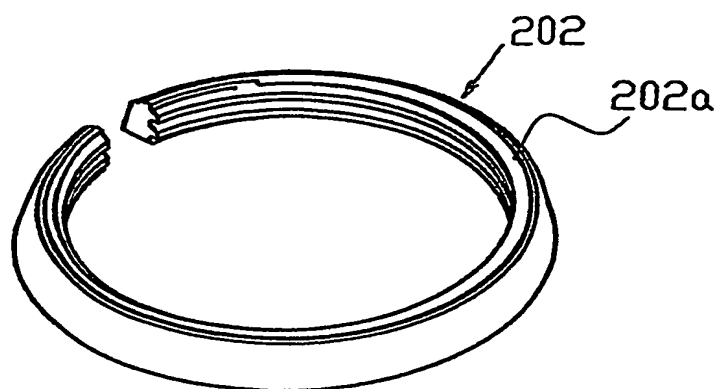


FIG. 4

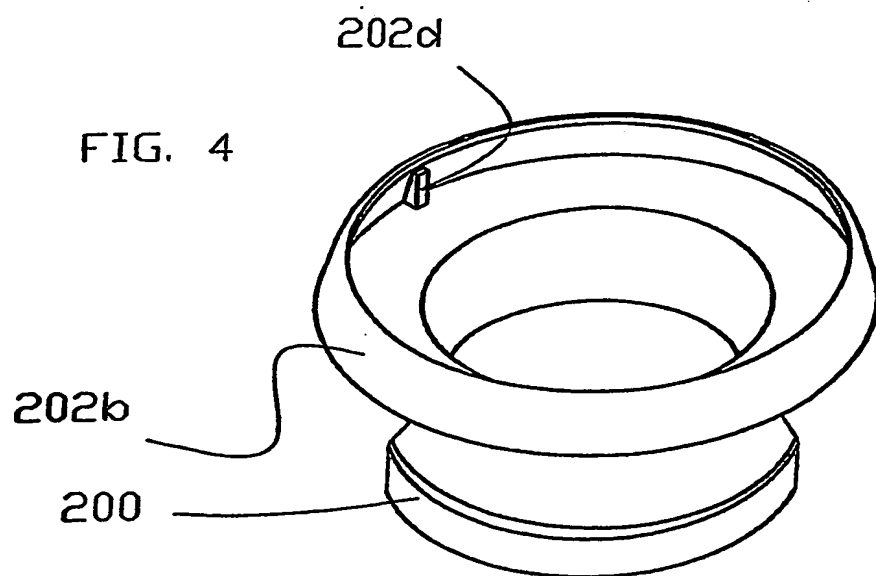

4/7

FIG. 5




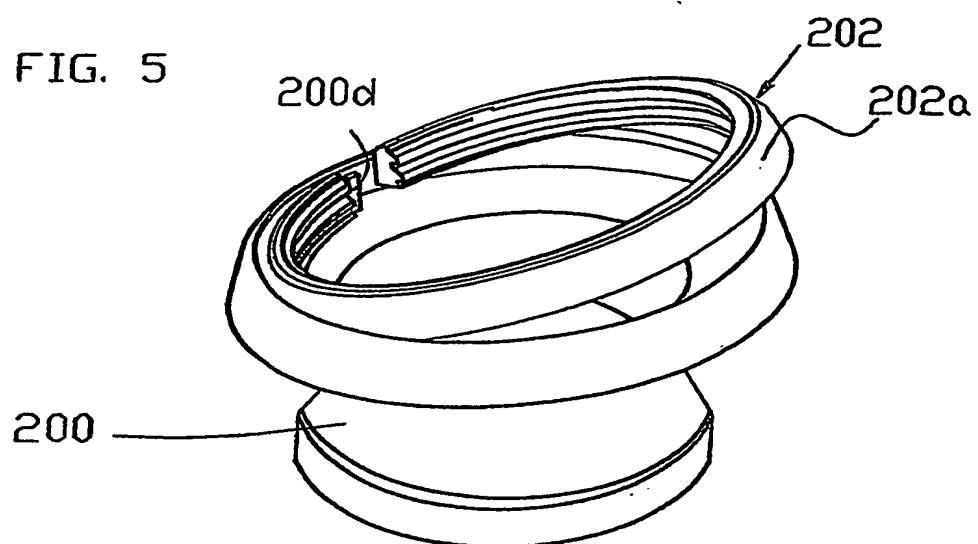


FIG. 6

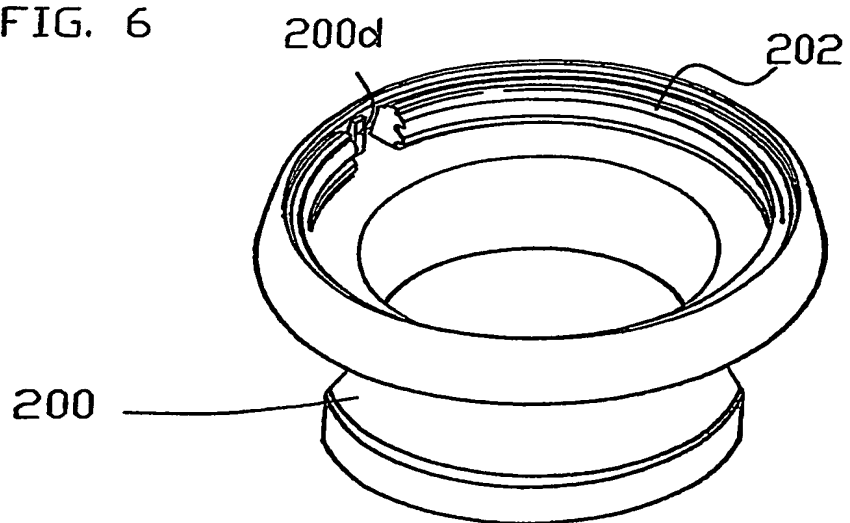


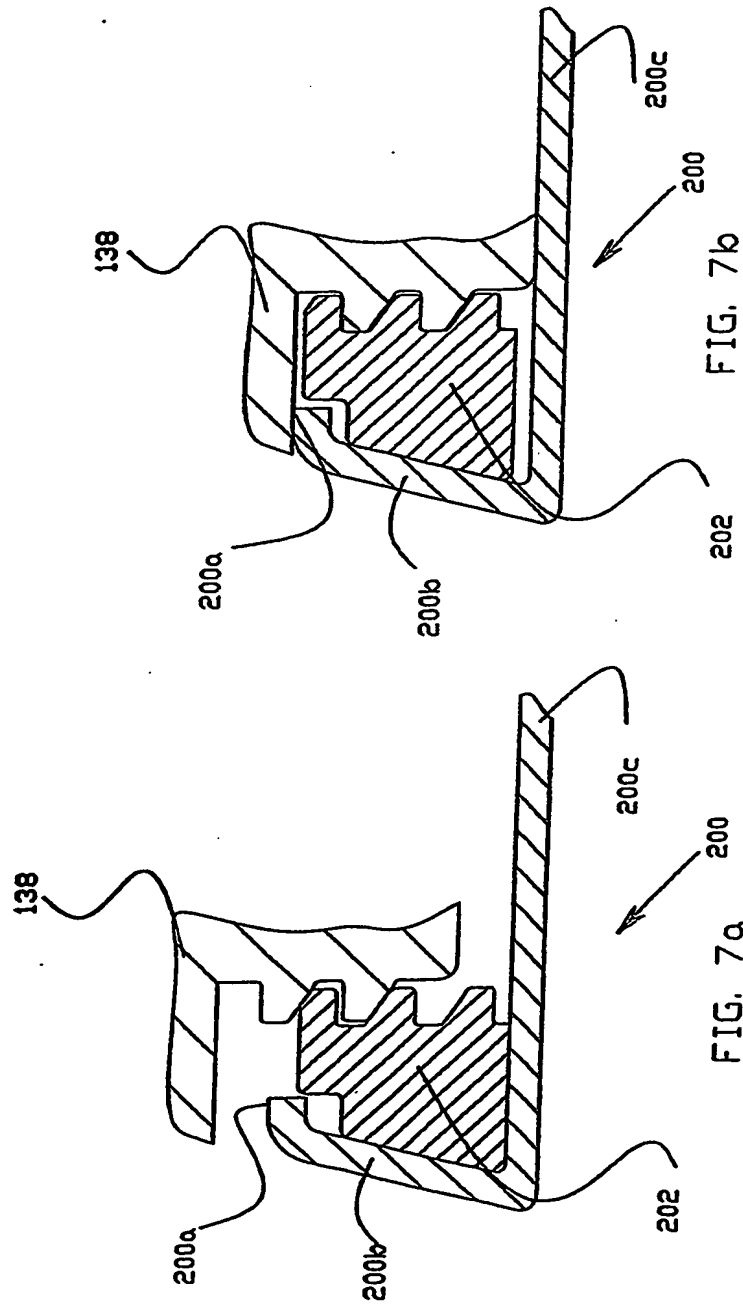

6/7

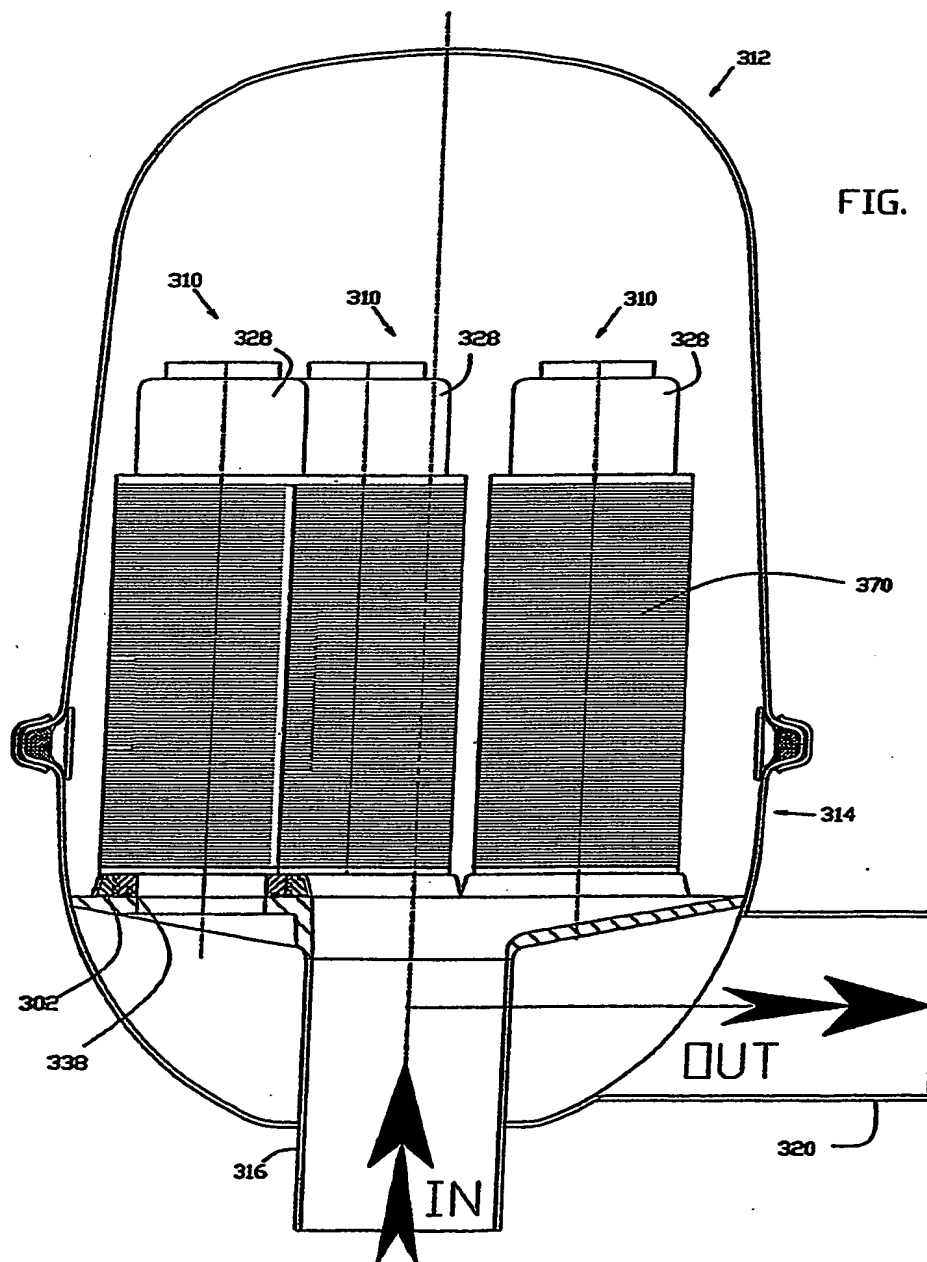

7/7

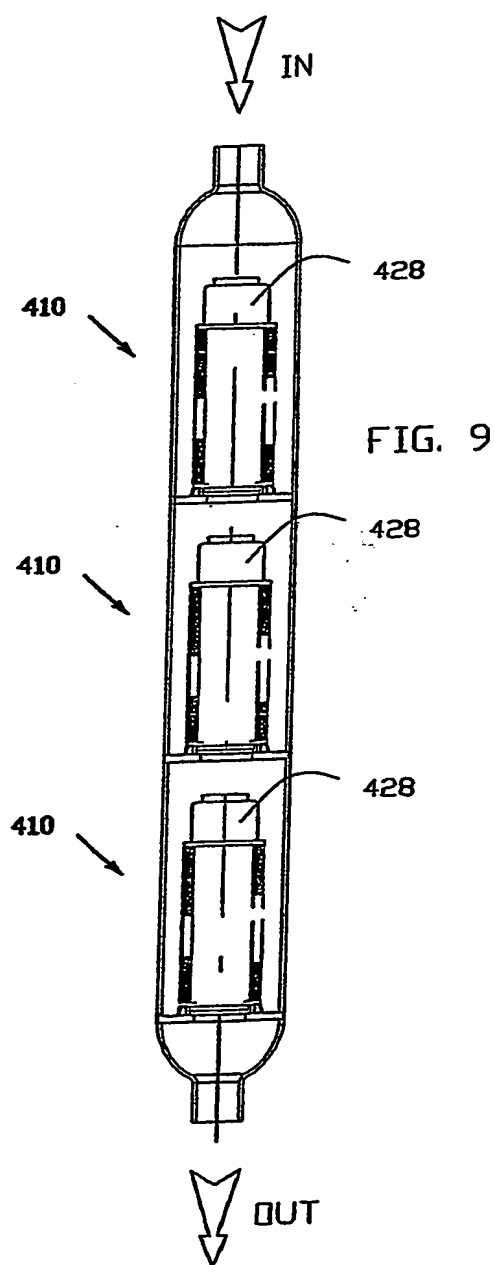

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL2004/000862

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B01D29/11 B01D29/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 398 037 B1 (SADAN YIFTACH ET AL) 4 June 2002 (2002-06-04) cited in the application figures 1,2,10	1,5,6
A	US 4 655 910 A (TABOR ELHANAN) 7 April 1987 (1987-04-07) figures 1,6	1,5
A	GB 1 316 324 A (WAVIN BV) 9 May 1973 (1973-05-09) page 1, line 54 - page 2, line 31; figure 1	1,2

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

5 January 2005

Date of mailing of the international search report

18/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Hild, U

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IL2004/000862

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6398037	B1	04-06-2002	IL 122675 A	28-01-2001
			AU 747925 B2	30-05-2002
			AU 1574399 A	05-07-1999
			BR 9812800 A	17-10-2000
			CN 1141164 C	10-03-2004
			DE 69816669 D1	28-08-2003
			DE 69816669 T2	03-06-2004
			EP 1054718 A1	29-11-2000
			ES 2207016 T3	16-05-2004
			WO 9930796 A1	24-06-1999
			JP 2002508234 T	19-03-2002
			ZA 9811395 A	14-06-1999
US 4655910	A	07-04-1987	IL 74908 A	09-02-1990
			IL 76570 A	17-09-1990
			AU 578401 B2	20-10-1988
			ZA 8602451 A	26-11-1986
GB 1316324	A	09-05-1973	NL 6914939 A	06-04-1971
			BE 756989 A2	02-04-1971
			DE 2048227 A1	22-04-1971
			FR 2064109 A5	16-07-1971
			IE 34615 B1	25-06-1975